



INTERLIGHT NEXT+ LED PANEL 3.500K

DATASHEET IL-P595K35NUSC & IL-P195K35NUSC




next
SERIES



INTERLIGHT NEXT+ LED PANEL 3.500K

DATASHEET IL-P595K35NUSC

Item number	IL-P595K35NUSC
GTIN	8719214379797
Brand	Interlight
Series	Next+
Type	LED
Color temperature (Kelvin)	3500
Color Rendering Index (CRI)	>90
Unified Glare Rating (UGR)	<19
Lumen output (lm)	3800
Power consumption incl. driver	30
Beam angle	>80°
Nom.voltage AC (V)	230
Driver included	No
Material of fixture	Aluminium, plastic
Color of fixture	White
Ingress Protection (IP)	20
Impact resistance (IK)	02
Suitable for emergency lighting	Yes
With motion sensor	No
With daylight sensor	No
Suitable for wall mounting	No
Suitable for pendant mounting	Yes
Suitable for ceiling mounting	Yes
Suitable for surface mounting	Yes
Suitable for recessed mounting	Yes
Suitable for office workspaces (EN12464-1)	Yes
Power factor	0.95
Length (mm)	595
Width (mm)	595
Height (mm)	33
Guarantee (years)	7

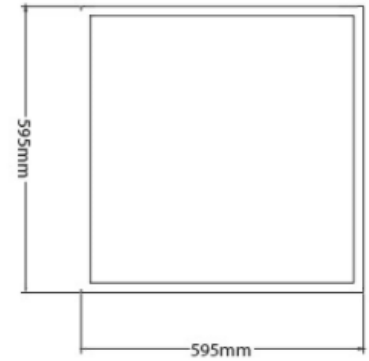

ACCESSORIES


IL-X3D40	Led driver dip switch 650-1000mA on/off
IL-X2D40-1-10	Led driver dip switch 400-1100mA 1-10V dimmable
IL-D48DALI2L	Led driver max. 1100mA DALI2 dimmable
IL-DCISET+	Emergency module with battery backup
IL-P595SK4	Panel surface mounting kit 60x60cm
IL-PKITMN60	Panel pendant mounting kit 60x60cm
IL-PKITSN4	Panel spring mounting kit 4pcs



INTERLIGHT NEXT+ LED PANEL 3.500K

DATASHEET IL-P195K35NUSC

Item number	IL-P195K35NUSC
GTIN	8719214379803
Brand	Interlight
Series	Next+
Type	LED
Color temperature (Kelvin)	3500
Color Rendering Index (CRI)	>90
Unified Glare Rating (UGR)	<19
Lumen output (lm)	3600
Power consumption incl. driver	30
Beam angle	>80°
Nom.voltage AC (V)	230
Driver included	No
Material of fixture	Aluminium, plastic
Color of fixture	White
Ingress Protection (IP)	20
Impact resistance (IK)	02
Suitable for emergency lighting	Yes
With motion sensor	No
With daylight sensor	No
Suitable for wall mounting	No
Suitable for pendant mounting	Yes
Suitable for ceiling mounting	Yes
Suitable for surface mounting	Yes
Suitable for recessed mounting	Yes
Suitable for office workspaces (EN12464-1)	Yes
Power factor	0.95
Length (mm)	1195
Width (mm)	295
Height (mm)	33
Guarantee (years)	7

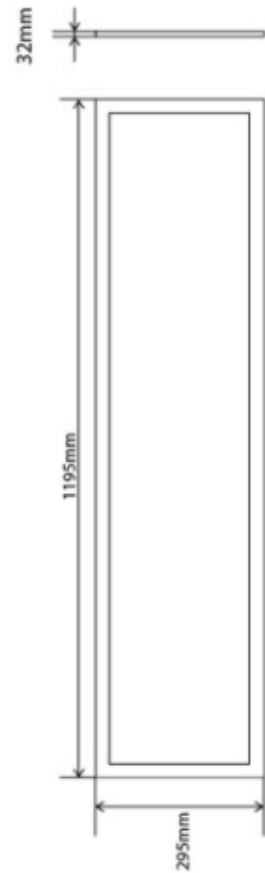

ACCESSORIES

IL-X3D40	Led driver dip switch 650-1000mA on/off
IL-X2D40-1-10	Led driver dip switch 400-1100mA 1-10V dimmable
IL-D48DALI2L	Led driver max. 1100mA DALI2 dimmable
IL-DCISET+	Emergency module with battery backup
IL-P195SK4	Panel surface mounting kit 120x30cm
IL-PKITMN120	Panel pendant mounting kit 120x30cm
IL-PKITSN4	Panel spring mounting kit 4pcs



KOOPMANINTERLIGHT.NL